

# TL39

## TOWABLE BOOM LIFT



- Tough yet compact towable boom lift
- Easy to set-up hydraulic stabilizers
- Maneuverable articulating/telescopic boom
- Smooth, easy to operate controls
- Simple to maintain

 **snorkel**™

[www.snorkellifts.com](http://www.snorkellifts.com)

# TOWABLE BOOM LIFT


# TL39

| DIMENSIONS                   | TL39                     |
|------------------------------|--------------------------|
| Max. working height          | 43 ft 9 in               |
| Max. platform height         | 37 ft 9 in               |
| Max. horizontal reach        | 21 ft                    |
| Platform width (C)           | 4 ft 1 in                |
| Platform depth (D)           | 2 ft 4 in                |
| Stabilizer footprint (A x B) | 13 ft 1 in x 11 ft 10 in |
| Towing length (F)            | 16 ft 8 in               |
| Towing width (E)             | 5 ft 3 in                |
| Stowed height (G)            | 6 ft 7 in                |


| PERFORMANCE                              |   |
|--|---|
| Platform capacity (SWL)                  | 475 lbs                                 |
| Max. wind speed                          | 28 mph                                  |
| Superstructure rotation (non-continuous) | 540°                                    |
| Wheels                                   | 185R14C                                 |
| Controls                                 | electric over hydraulic, variable speed |

| POWER         |   |
|---------------|---|
| Power source  | 24V DC battery  |
| Power options | Gasoline, bi-energy (combustion and battery), AC electric, diesel |

| WEIGHT              |           |
|---------------------|-----------|
| Weight (DC battery) | 3,703 lbs |

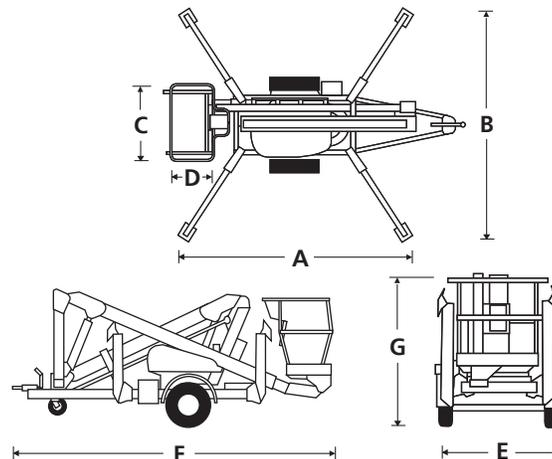

## WORKING ENVELOPE

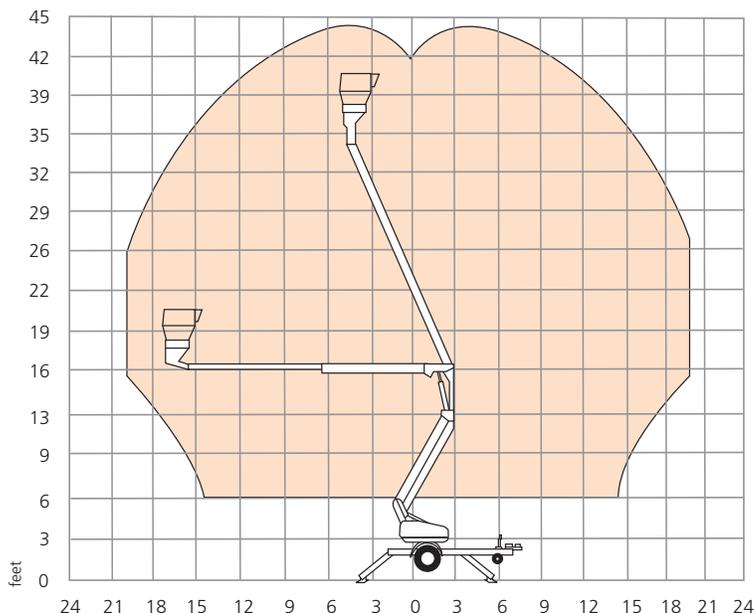

## STANDARD FEATURES

- Articulating / telescopic boom configuration
- Auto-level hydraulic stabilizers with LED indicators
- Integral road lighting board
- Electric controls at platform
- Hydraulic platform rotate
- Integrated automatic battery charger 110V-230V
- Dual lanyard attachment points
- Power line to platform
- 2 year parts & labor, 5 year structural warranty
- ANSI & DOT compliant

## OPTIONS

- Special paint colors
- Work lights in platform
- Flashing amber light
- Airline to platform
- Nylon spreader pads (set of 4)
- 110V/220V AC power
- Gasoline power
- Bi-energy (gas + batteries)
- Diesel engine
- Environmental hydraulic oil

**snorkel**

www.snorkellifts.com

P.O. Box 1160  
 St. Joseph, MO 64502-1160, USA  
 Tel: 1 (785) 989-3000  
 Toll-free: 1 (800) 255-0317  
 Fax: 1 (785) 989-3070  
 Email: sales.usa@snorkellifts.com